

FINISHING EQUIPMENT

DRY CLEANING • WET CLEANING • TENSIONING

Quality Without Compromise



UNIPRESS

Leading the World in Quality Finishing Equipment

Drycleaning Presses

LEGGER PRESSES



Automatic Double Leg Pants Press

All Unipress Dry Cleaning Presses Feature:

- Fast Smooth Operation
- Microprocessor Controls w/self-diagnostics
- Single Cylinder Operation
- Rapid Steam Distribution
- Finger Tip Pressure Regulator
- Wide Angle Opening



Automatic Pants Press



Automatic Hot Head Pants Press

UTILITY PRESSES



Available in 45" Buck
Right or Left Hand



Hot Head Utility Press

MUSHROOM TOPPERS



Mushroom Press



Hot Head Mushroom Press

Tensioning Finishing Equipment



WET CLEANING • DRY CLEANING • LAUNDRY



- One Touch Program Selection
- 9 Program Cycles that adjust to garment
- High Capacity Blower
- Interchangeable Front Clamps (Heated & Padded)



MEN'S SHIRTS, LAB COATS, DRESSES, AND MUCH MORE

Improves Quality Increases Production



WET CLEANING • DRY CLEANING

Simple easy to use
Tensioning Topper for all
types of pants



WET CLEANING • DRY CLEANING

9 Program Cycles that automatically
applies the correct amount of Tension,
Steam, Air and Time to the pants
for a great finish.



WET CLEANING • DRY CLEANING

Suit Coats
Dresses
Gowns
Golf Shirts

- 9 Program Cycles
- One Touch Program Selection
- Rotating Form
- High Capacity Blower

Automatic Bagger



- **Garments up to 60"**
- **Reduces Labor**
- **Poly Sensor (Signals Operator when Poly is Low)**
- **Fast - Up to 280 Bundles per Hour**
- **Automatic and Manual Operation**



**Optional Un-Loader
Adjusts to height of slick rail**



Control Panel

Auxiliary Finishing Equipment



ASF Form Finisher



STF Semi Automatic Topper



SC1 Steam Cabinet



PI-1 Single Puff Iron



PI-2 Double Puff Iron



PI-3 Three Head Puff Iron
Available with Dual Pedals




SST Steam
Spotting Board
Available with
Glass or Stainless
Steel Top




PI-3HV Three Head Puff Iron
with Fabric Head & Vacuum


Recommended Layouts


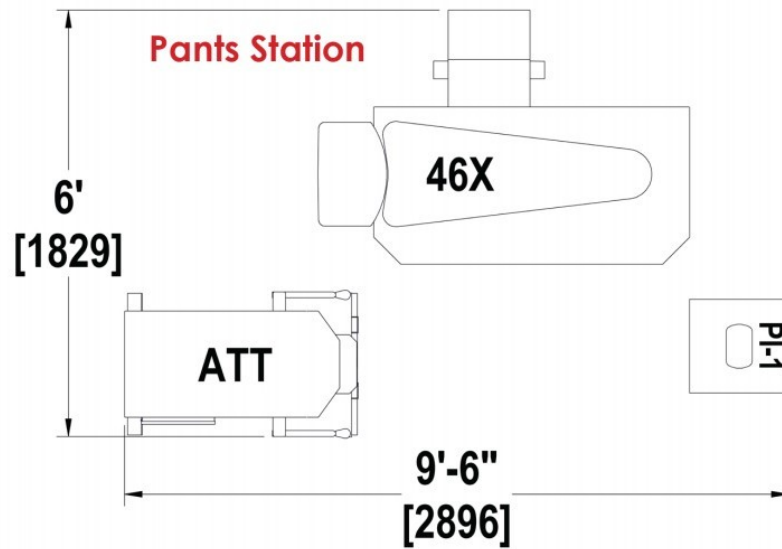


**Traditional
Utility Station**

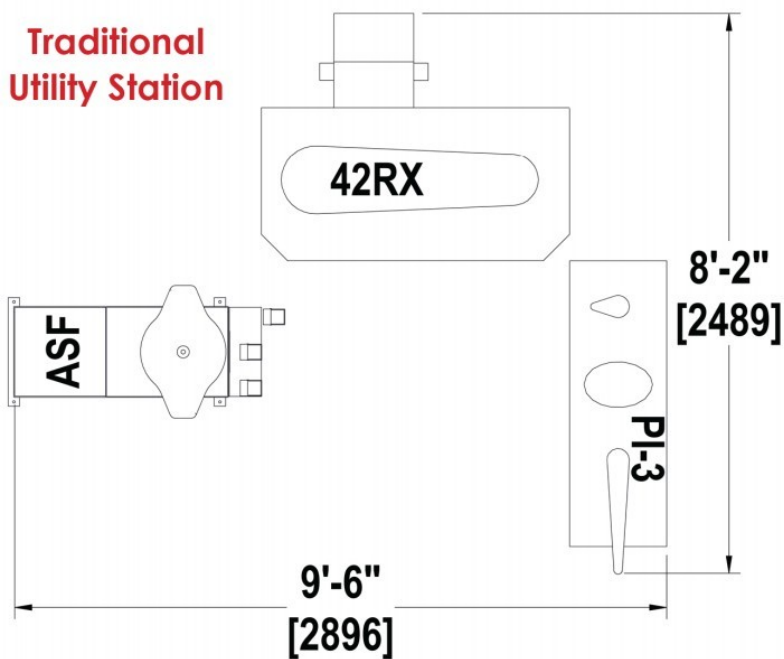

**Tensioning
Utility Station**

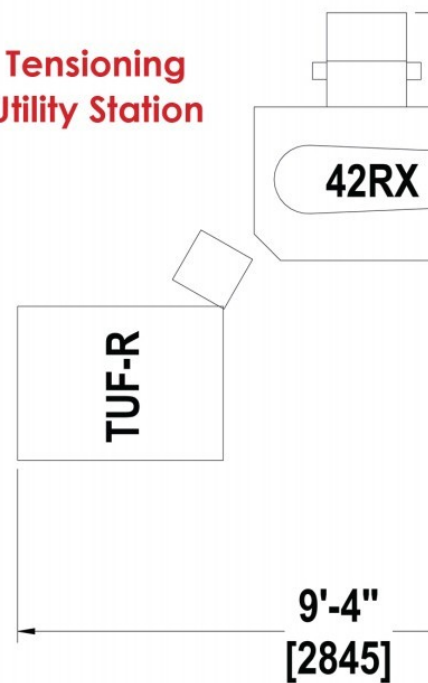


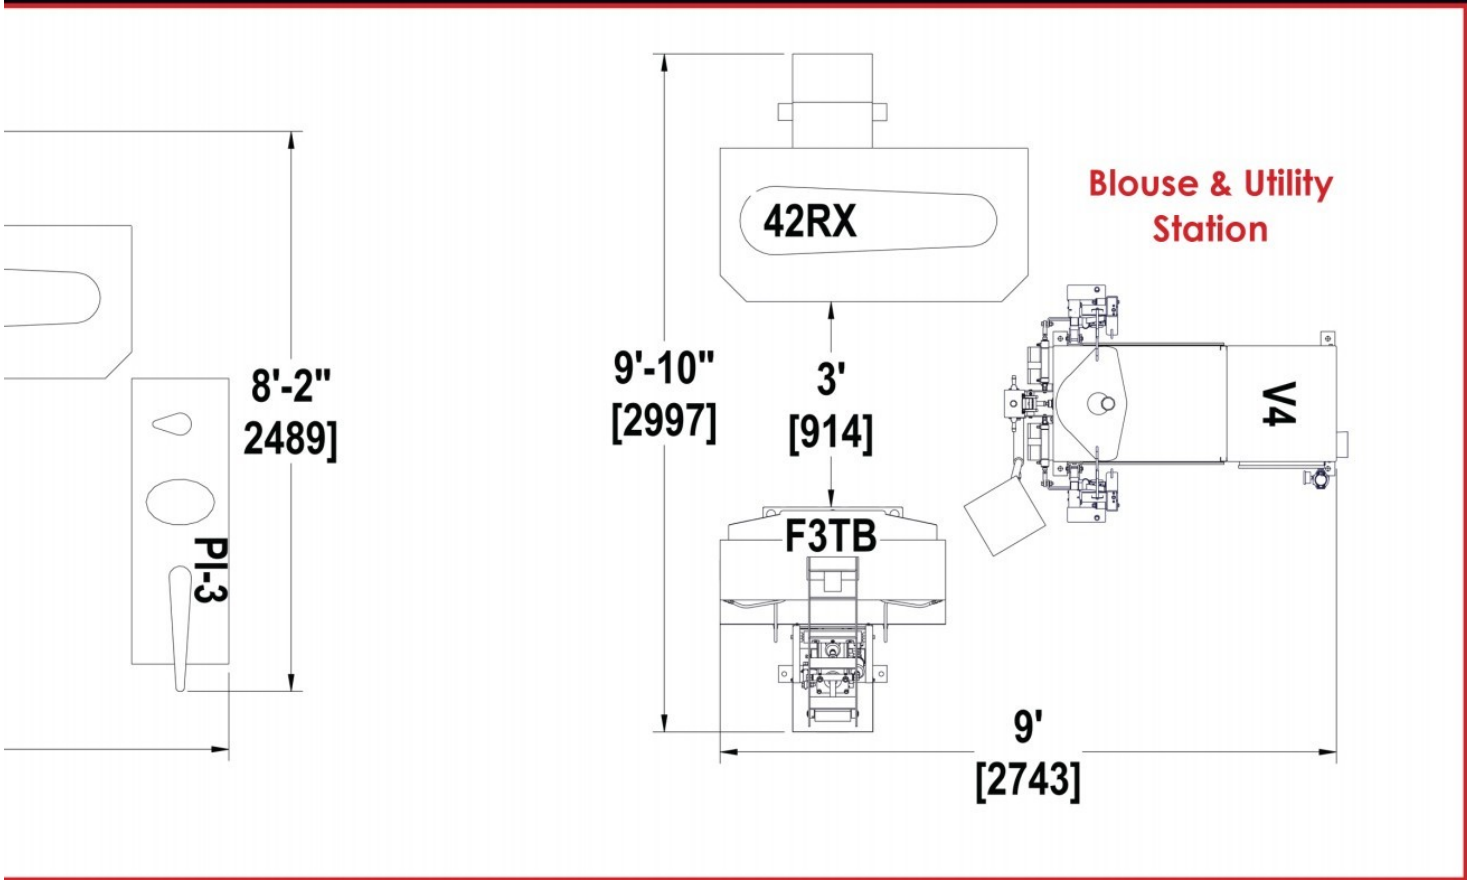
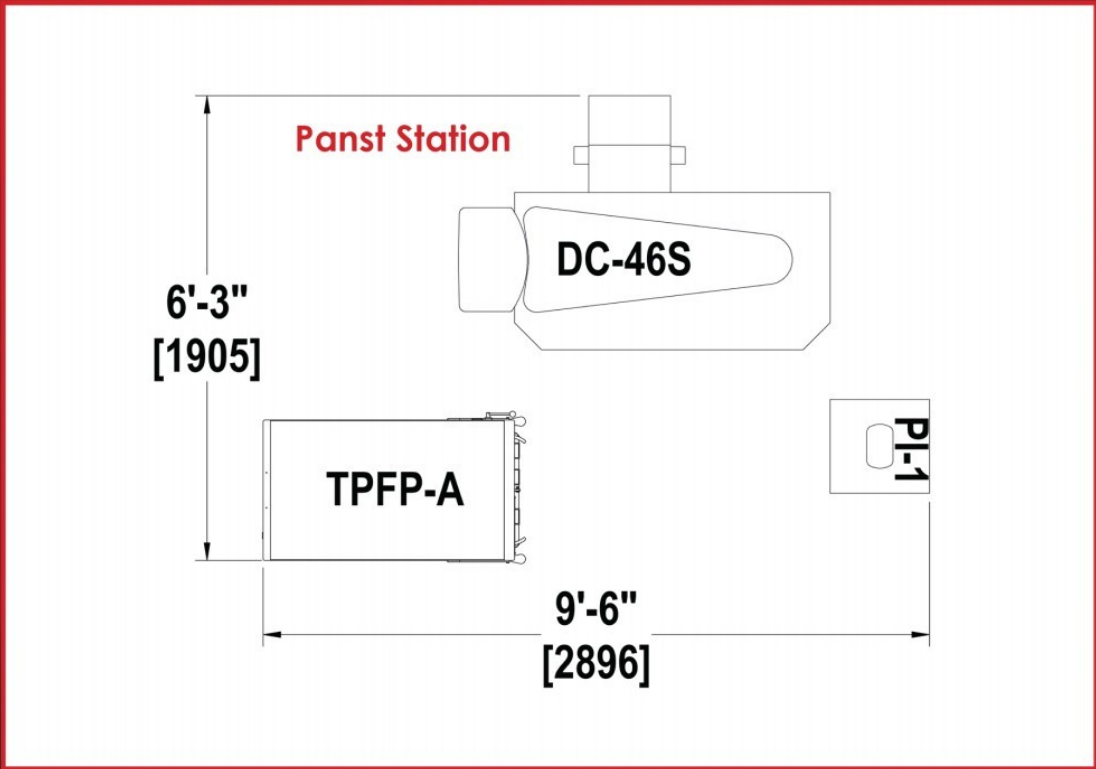


Technical

Dry Cleaning Presses



Models: 46X, DC46S, 46XH, 42X L&R, 42XH, 45X L&R

Models: 19MX, 19MXH





Form Finishers



ASF

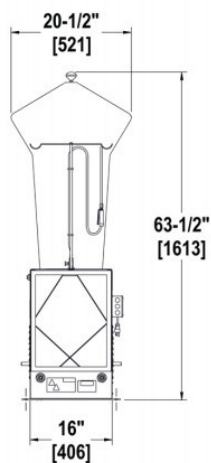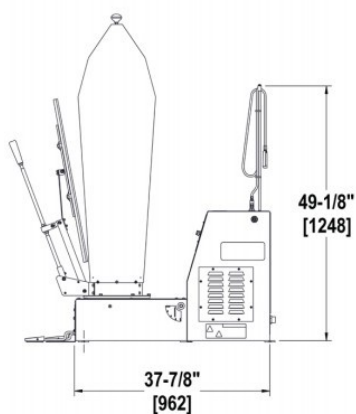



VERSAFORM V4

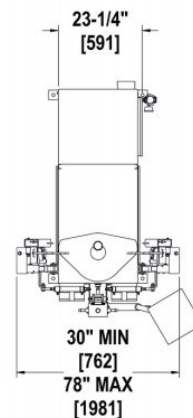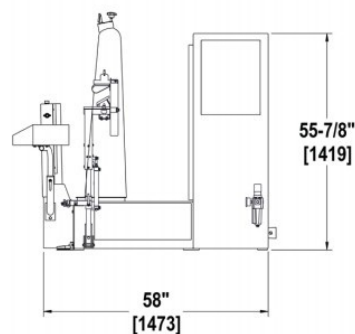



BAG XL

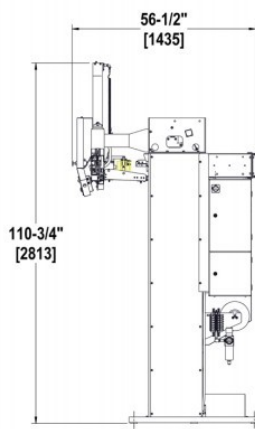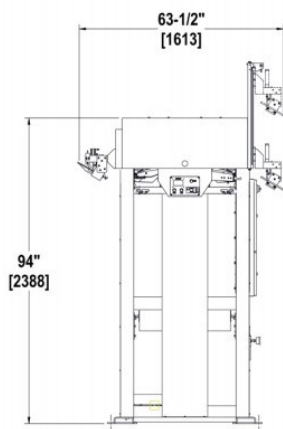




Spotting Board

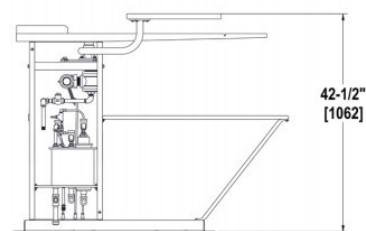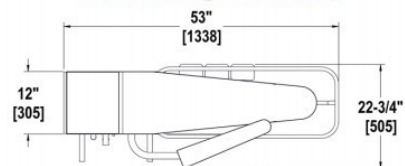



Buck Dimensions

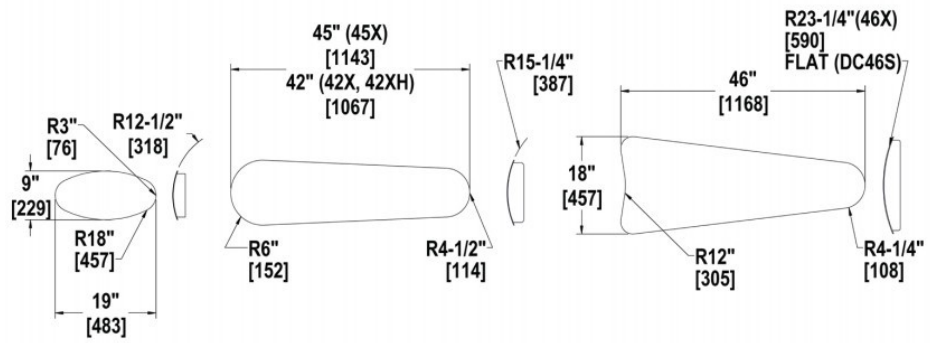



TUF-R

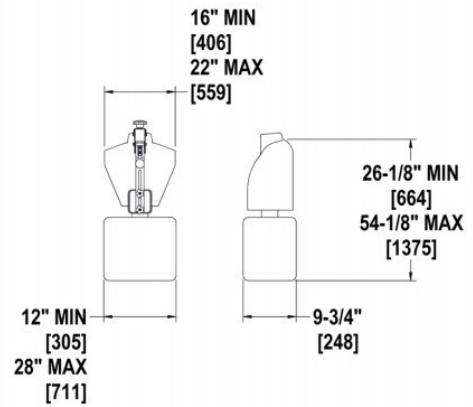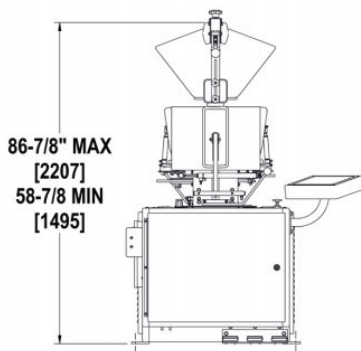

Steam Cabinet

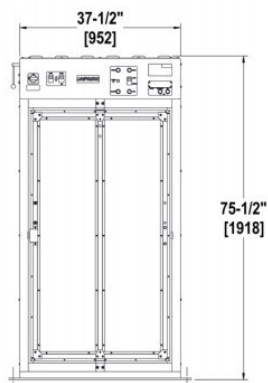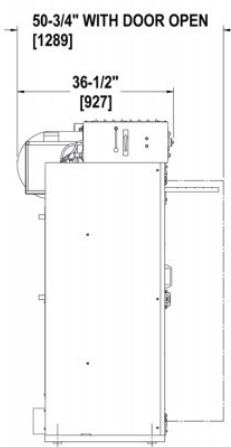

Toppers

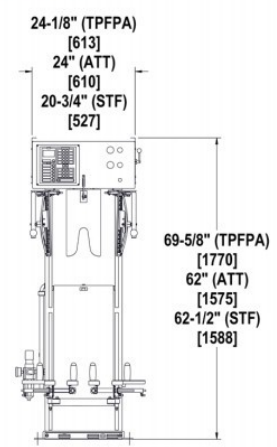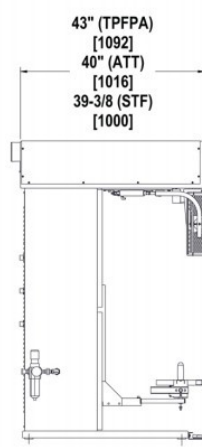

Equipment Specifications

DC Presses	46X	46XH	DC46S	19MX	19MXH	42X	45X	
Overall Height	48.88"	48.88"	48.88"	48.88"	48.88"	48.88"	48.88"	
Overall Length	43.5"	43.5"	43.5"	43.5"	43.5"	43.5"	43.5"	
Overall Width	64.25"	34.25"	64.25"	37"	37"	54"	54"	
Steam Inlet	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	
Steam Outlet	1/2" (2)	1/2" (2)	1/2" (2)	1/2" (2)	1/2" (2)	1/2" (2)	1/2" (2)	
Steam Supply	85 PSI	85 PSI	85 PSI	85 PSI	85 PSI	85 PSI	85 PSI	
Boiler HP	1	1	1	1	1	1	1	
Vac Outlet	1-1/4"	1-1/4"	1-1/4"	1-1/4"	1-1/4"	1-1/4"	1-1/4"	
Air Inlet	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	
Air Cons/Cycle	1/2 Cu. Ft.	1/2 Cu. Ft.	1/2 Cu. Ft.	1/2 Cu. Ft.	1/2 Cu. Ft.	1/2 Cu. Ft.	1/2 Cu. Ft.	
Air Supply	85 PSI	85 PSI	85 PSI	85 PSI	85 PSI	85 PSI	85 PSI	
Electrical	115/1/60	115/1/60	115/1/60	115/1/60	115/1/60	115/1/60	115/1/60	
Amperage	1/2 AMP	1/2 AMP	1/2 AMP	1/2 AMP	1/2 AMP	1/2 AMP	1/2 AMP	
Net Weight	850 lbs	880 lbs	950 lbs	675 lbs	620 lbs	795 lbs	805 lbs	
	STF	ATT	TPFPA	TUFR	V4	ASF	BAG XL	SC1
Overall Height	62.5"	62"	73.69"	58.88"	56"	63"	110.75"	75.5"
Overall Length	41.38"	40"	43"	41.25"	58"	44.38"	56.5"	50.75"
Overall Width	20.75"	24"	24.13"	41.38"	84"	20.5"	63.5"	40.5"
Steam Inlet	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	N/A	1/2"
Steam Outlet	1/2" (2)	1/2" (2)	1/2"	1/2"	1/2"	1/2"	N/A	1/2"
Steam Supply	85 PSI	85 PSI	85 PSI	85 PSI	85 PSI	85-90 PSI	N/A	85 PSI
Boiler HP	0.75	0.75	2	2	2	2	N/A	2
Air Inlet	N/A	N/A	1/2"	1/2"	1/2"	N/A	1/2"	N/A
Air Supply	85 PSI	85 PSI	85 PSI	85 PSI	85 PSI	N/A	85 PSI	N/A
Air cons/Cycle	N/A	N/A	.1 CuFT/cyc	.1 Cu Ft	.1 Cu Ft	N/A	.1 Cu Ft	N/A
Electrical	115/1/60	115/1/60	230/3/60	230/3/60	230/3/60	115/1/60	230/3/30	230/3/60
Amperage	5 AMPS	7 AMPS	5 AMPS	5.4 AMPS	7 AMPS	7.5 AMPS	10 AMPS	10 AMPS
Net Weight	395 lbs	450 lbs	805 lbs.	780 lbs	1050 lbs	280 lbs	930 lbs	745 lbs
	PI-1	PI-2	PI-3	PI-3HV	PI-3D	SST		
Overall Height	41.88"	44.88"	44.88"	44.88"	45/.5"	42.5"		
Overall Length	17"	17"	17"	19.25"	16.5"	53"		
Overall Width	16"	41.25"	54.75"	54.75"	54.75"	22.75"		
Steam Inlet	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"		
Steam Outlet	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"		
Steam Supply	85 PSI	85 PSI	85 PSI	85 PSI	85 PSI	85PSI		
Boiler HP	0.13	0.25	0.5	0.5	0.5	1		
Air Inlet	N/A	N/A	N/A	N/A	N/A	1/2"		
Air Supply	N/A	N/A	N/A	N/A	N/A	85 PSI		
Air cons/Cycle	N/A	N/A	N/A	N/A	N/A	N/A		
Vac Outlet	N/A	N/A	N/A	N/A	N/A	1-1/4"		
Net Weight	125 lbs	150 lbs	235 lbs	280 lbs	265 lbs	280 lbs		

3501 Queen Palm Drive, Tampa FL 33619

813.623.3731 UnipressCorp.com

UNIPRESS